





1/2 " N

105
105

1/2 " N

1 1/2 " N
2022 1 1 -2022 12 31

48.3 kg CO₂-eq



1. 3
2. 3
3. 3
- 4.



4.1

PVC

4.2

1/2 " N

4.3

4.4

4.4.1



4.4.2



Pin	NML1/2H.00.02-HPb55-3/-HX	3		0.9	g
Inner core	NML1/2B.02.02-/-HX	3		1.24	g
Rear insulator	NML1/2F.00.08-TPX/-		TPX	0.15	g
Insulator	NML1/2F.00.07-TPX/-		TPX	0.25	g
Seal ring	NML1/2H.00.06-R01/-			0.15	g
PVC PVC flat pad	NML1/2E.00.08-PVC R01/-		PVC	0.22	g
Circlip	NML1/2F.00.06-SUS304/-		304#	0.37	g
packaging				1/300	p

2

		5T	171	km
		30T	57	

3

--	--



W-08-23-0884

7

11

Thompson

5505-2000

5505

m

(.)

2

2022

10



2022 1 1 2022 12 31

6.2

≤ 0.5%

6.2.1

cut-of

6.2.2

6.3

IPCC

2019 GWP100

7

		48.3	kgCO ₂ -eq
Upstream transportation		0.003	
Raw material assembly		8.57	
Packaging		0.121	
Downstream transportation		39.6	
			kgCO ₂ -eq
Enclosure		0.737	
Inner core		0.783	
Seal ring		0.777	
Screw insert		0.788	
Circlip		0.24	
Insulator		1.29	
Rear housing		0.787	
Rear insulator		0.777	
Cable clamp		0.661	



W-08-23-0884


9

11


Pin
PVC PVC flat pad

0.584
1.14

7.1

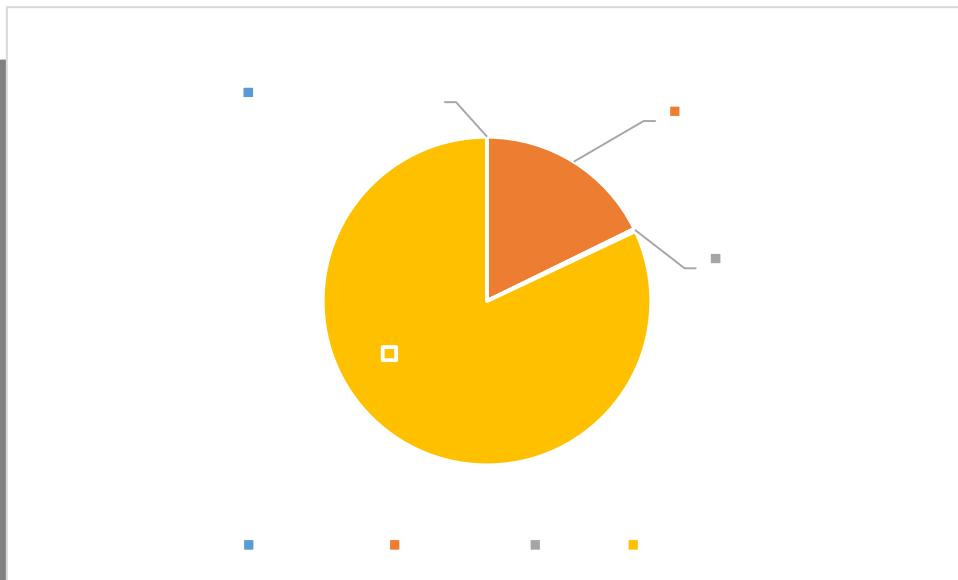

1

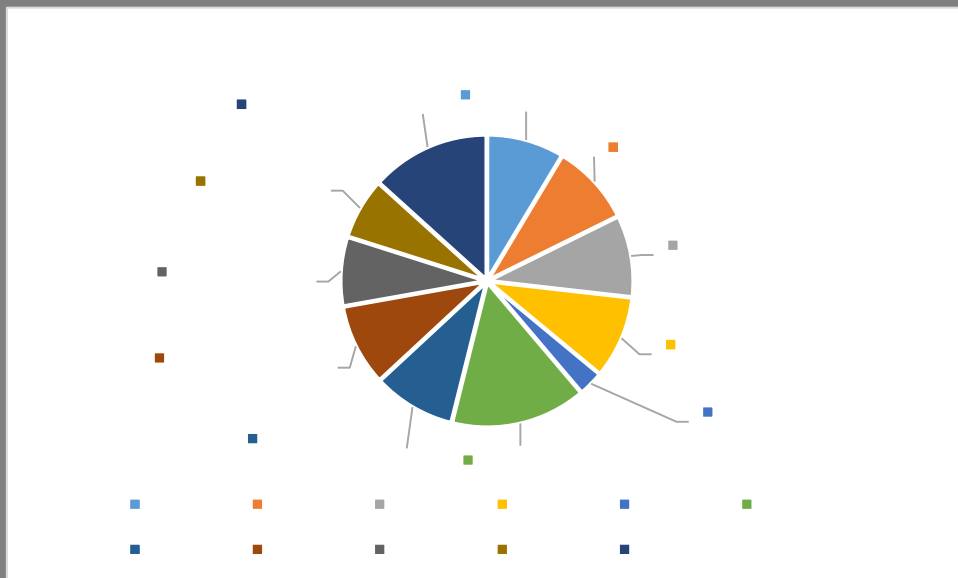

2



7.2


XXXXXXXXXXXXXXXXXXXX

7.2.1

cut-of

7.2.2

IPCC 2021 GWP100 V1.01



	3	-	GWP100
47.9 kg CO ₂ -eq	2.85	48.3 kg CO ₂ -eq	95%
		5.92%	

7.3



2023

8

8.1

8.2

8.3

8.4

